




## Data sheet AHR-40/60

Lift to be used in new or existing overhead crane system or jib crane. Unique handle and control system for supervision of both lift and gripper function. Provides the user with maximum simplicity and safety.

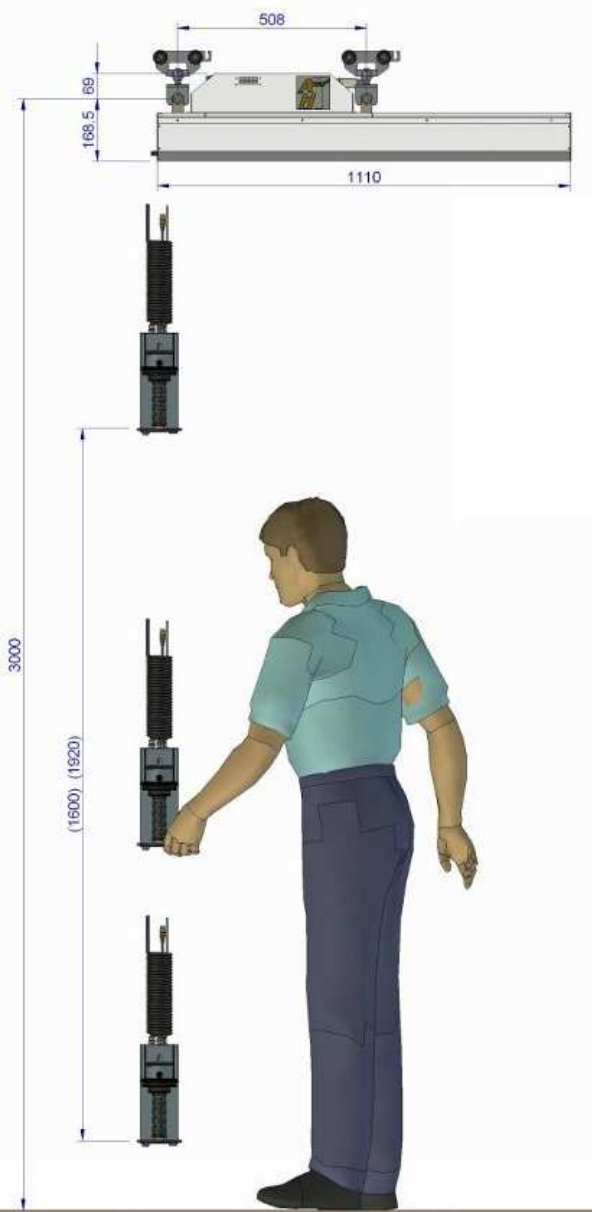

### Product advantages

- The AHR models can easily be mounted in existing overhead crane system or rail systems.
- Air driven, gives smooth and responsive handling.
- Few moving parts and a simple design gives high reliability.
- Fast and easy handling with the patented handle. The lift follows all of the operators hand movements.
- When not holding the handle the lift system will be automatically balanced in weight. You can then holding directly onto the handled material and move it up and down.
- Easy to fit various gripper underneath the handle with safety functions that preventing the gripper to release when goods are being lifted in mid-air



### Product data AHR-40/60

Max load	40 / 60 kg
Lift stroke	1920 / 1600 mm
Suspention	2 trolleys in rail
Feed pressure	6 Bar
Power supply	110-230VAC

Above the handle's membrane is the push button with indicator-LED for gripping function mounted. In an enclosure is the gripper valve, air outputs and input for "GripOk"-sensors placed. Under the handle is gripper attached with an M16 bolt. All control functions for the gripper are included in an Air-Handle lift.



**Call now! And we can discuss proper lift and gripper for your handling.**